

Double channel programmable transmitter for Pt100

DAT 2066

FEATURES

- Pt100 input
- Input range programmable either with °C or °F unit measure
- Zero e Span values programmable by DIP-switches
- 4+20 mA linearised output
- Good accuracy and performance stability
- EMC compliant – CE / UKCA mark
- DIN rail mounting in according to EN-50022 and EN-50035 standards



GENERAL DESCRIPTION

The double channel transmitter DAT 2066 is designed to provide on the output two linearised 4+20 mA current loop signals proportional with the temperature characteristics of the Pt100 sensors connected on its inputs. It is possible to connect on the input both 3 wire Pt100 and 2 wire Pt100. The user can program the input ranges of each channel by the proper DIP-switches available after opening the suitable door located on the side of device.

The regulation of Zero and Span values is made by the ZERO and SPAN potentiometers located on the front side of device.

Moreover, an isolation of 1000 Vac is provided among the channels; it allows to avoid signal errors due to the ground loops and to reduce eventual R.F. Interferences.

It is housed in a plastic enclosure of 12.5 mm thickness suitable for DIN rail mounting in according to EN-50022 and EN-50035 standards.

OPERATIVE INSTRUCTIONS

The connections must be made as shown in the section "Wiring".


The 4+20 mA output signal is measurable in series to the power loop as shown in the section "Power supply/output connections"; "Rload" is the input impedance value of the instruments located on the current loop; for a correct measure, it is recommended that the maximum value of "Rload" must be calculated as function of the power supply value (refer to the section "Load characteristic").

The configuration of input range values is made by DIP-switches (refer to the section "Input range table").

After the transmitter configuration, it is necessary to calibrate it using the ZERO and SPAN; this operation is illustrated in the section "DAT 2066: Configuration and calibration".

To install the device refer to the section "Installation instructions".

TECHNICAL SPECIFICATIONS (Typical @ 25 °C and in nominal conditions)

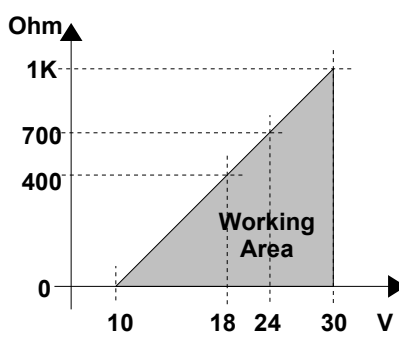INPUT (2 CHANNELS)	OUTPUT (2 CHANNELS)	GENERAL SPECIFICATIONS
RTD Pt100 2 or 3 wires in compliance to IEC 60751 Configurability for Span Minimum value 40 °C 104 °F Configuration From 40 °C to 450 °C From 104 °F to 842 °F Configurability for Zero Configuration From -80 °C to 50 °C From - 112 to 122 °F Input calibration (1) Pt100 ± 0.1% f.s. Linearity (2) Pt100 ± 0.15 % f.s. Line resistance influence (1) Pt100 0.05 % f.s./ohm (100 ohm max. balanced on each wire) RTD Excitation current Typical 1 mA	Output type Current 4+20 mA two wires Thermal drift (1) Full Scale ± 0.03 % of full scale /°C Out of scale values Type positive (> 20 mA) Maximum value 35 mA Response time (10+ 90%) 300 ms circa Warm-up time 1 minute Load characteristic - Rload (maximum load value on current loop per power supply value) 	Power supply voltage 10 .. 30 Vdc Reverse polarity protection 60 Vdc max ISOLATION Among the channels 1000 Vac, 50 Hz, 1 min. ENVIRONMENTAL CONDITIONS Operative temperature -20°C .. +70°C Storage temperature -40°C .. +85°C Humidity (not condensing) 0 .. 90 % Maximum Altitude 2000 m slm Installation Indoor Category of Installation II Pollution Degree 2 MECHANICAL SPECIFICATIONS Material Self-extinguish plastic IP Code IP20 Wiring wires with diameter 0.8+2.1 mm ² AWG 14-18 Tightening Torque 0.8 N m Mounting in compliance with DIN rail standard EN-50022 and EN-50035 Weight about 90 g. CERTIFICATIONS EMC (for the Industrial Environments) Immunity EN 61000-6-2 Emission EN 61000-6-4 UKCA (ref S.I. 2016 N°1091) Immunity BS EN 61000-6-2 Emission BS EN 61000-6-4

(1)referred to input Span (difference between Val. max. and min.)
 (2)inclusive of hysteresis and variations of power supply voltage

DAT 2066: CONFIGURATION & CALIBRATION

- 1) Calculate the difference between the maximum and the minimum value of the input range (Span).
 - 2) Refer to the " Input range table " and determine in the column " SPAN " the position where the calculated value is included, then referring to the position obtained determine in the column "ZERO", the line in which the minimum value is included .
 - 3) Set the DIP-switches as indicated .
 - 4) Connect on input a 3 wire Pt100 simulator programmed to supply the maximum and minimum values of the input range or a fixed resistor of the same values.
 - 5) Set the simulator at the minimum temperature or to connect a fixed resistor correspondent to the minimum value .
 - 6) By the ZERO potentiometer of the channel in use calibrate the output at the 4 mA value .
 - 7) Set the simulator at the maximum temperature or to connect a fixed resistor correspondent to the maximum value .
 - 8) By the SPAN potentiometer of the channel in use calibrate the output at the 20 mA value .
 - 9) Repeat the operation from the step 5 to the step 8 until the output value will be correct (3 attempts typically required).
- Note: the configuration procedure is the same for twice measure channels.

Example of configuration: -50/200 °C.

Span => 200°C - (-50°C) = 250°C;


Input switches configuration: (SW1 and/or SW2): Off, Off, Off, Off.

INPUT RANGE TABLE

Channels 1 & 2		SW1 & SW2			
SPAN	ZERO	1	2	3	4
< 95°C (203°F)	- 80÷-30°C(-112÷-22°F)	●			
< 95°C (203°F)	- 30÷15°C(-22÷59°F)		●	●	
< 95°C (203°F)	15 ÷ 50°C(59÷122 °F)		●	●	●
95÷200°C(203÷392°F)	- 80÷-30°C(-112÷-22°F)	●	●		
95÷200°C(203÷392°F)	- 30÷15°C(-22÷59°F)	●	●	●	
95÷200°C(203÷392°F)	15÷50°C(59÷122 °F)	●	●	●	●
200÷300°C(392÷572°F)	- 80÷50°C(-112÷122°F)				
300÷450°C(572÷842°F)	- 80÷50°C(-112÷122°F)	●			

● = DIP SWITCH " ON"

ISOLATIONS

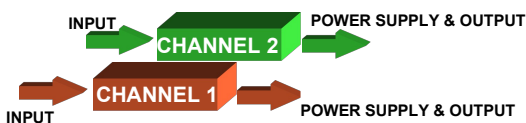


INSTALLATION INSTRUCTIONS


The device is suitable for DIN rail mounting in vertical position. It is necessary to install the device in a place without vibrations . Moreover, it is recommended to use shielded cable to connecting signals and to avoid routing conductors near power signal cables.

WIRING


INPUT CONNECTIONS - Pt100 3 WIRES

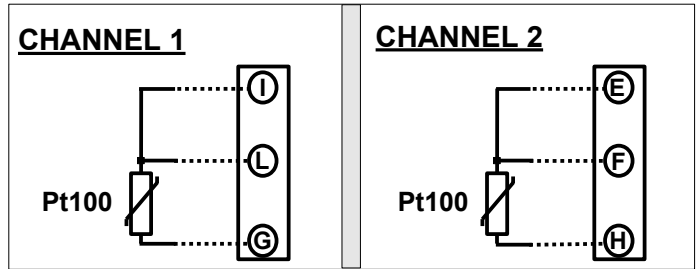

INPUT CONNECTIONS - Pt100 2 WIRES

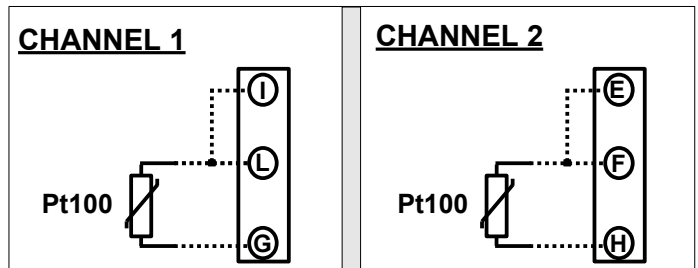


POWER SUPPLY/OUTPUT CONNECTIONS

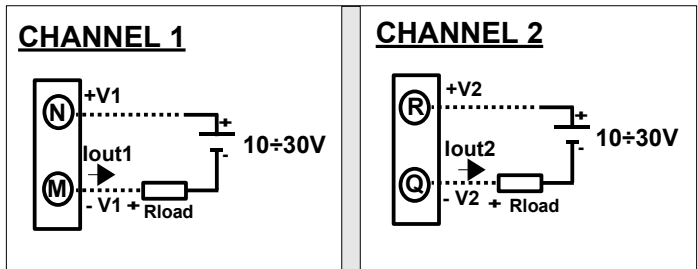

Note: terminals O and P not connected (NC).

DIMENSIONS (mm) & REGULATIONS

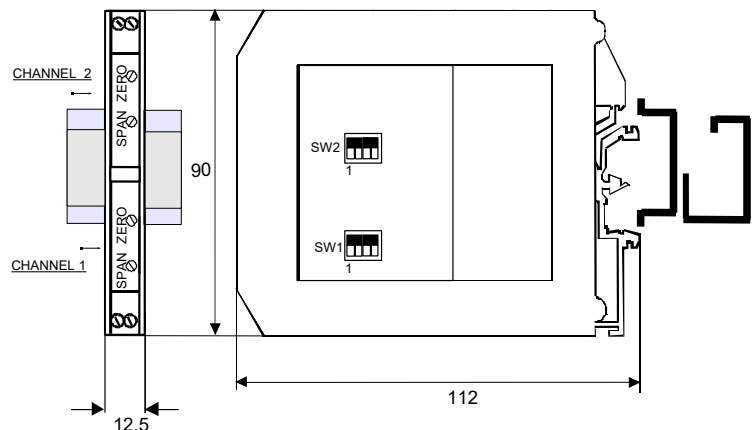

HOW TO ORDER

The device is supplied regulated as requested on the order. In case of the configuration is not specified, the parameters must be set by the user.

ORDER CODE EXAMPLE:

DAT2066 CH1 = 0 ÷ 200 °C/°F CH2 = 0 ÷ 200 °C/°F

Input range ch 1

Unit of measure ch 1

Input range ch 2

Unit of measure ch 2

The symbol reported on the product indicates that the product itself must not be considered as a domestic waste. It must be brought to the authorized recycle plant for the recycling of electrical and electronic waste. For more information contact the proper office in the user's city , the service for the waste treatment or the supplier from which the product has been purchased.