


Distributed I/O device 8 Volt output channels communicating over RS-485

DAT 3028

FEATURES

- Modbus Server device on RS-485
- Modbus RTU/ Modbus ASCII protocol
- 8 output channels
- Outputs configurable as Voltage
- Watch-Dog Alarm
- Remotely Configurable
- 2000 Vac 3-ways Galvanic Isolation
- LED of signalling on front side for power supply and communication
- Connection by removable screw terminals
- High accuracy
- CE / UL / UKCA mark
- DIN rail mounting in compliance with EN-50022

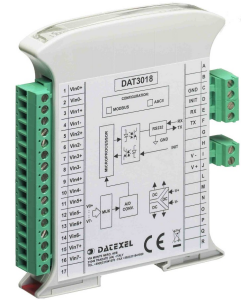

GENERAL DESCRIPTION

The device DAT3028 generates 8 output analog signals from digital commands. The data are transmitted with MODBUS RTU/MODBUS ASCII protocol on the RS-485 network (RS-232 interface is available). It is possible to generate voltage signals up to 10V.

The device guarantees high accuracy and stable measure versus time and temperature.

To ensure the plant safety, it is provided a Watch-Dog timer alarm.

The isolation between the parts of circuit removes eventual ground-loop effects, allowing the use of the device even in the heavy environmental conditions. The device is in compliance with the Directive UL 61010-1 for US market and with the Directive CSA C22.2 No 61010-1 for the Canadian market. It is housed in a rough self-extinguishing plastic container which, thanks to its thin profile of 17.5mm only, allows a high density mounting on EN-50022 standard DIN rail.

USER INSTRUCTIONS

Before to install the device, please read the "Installation Instruction" section.

If the module configuration is unknown, with device powered off, connect the INIT terminal to the GND terminal (ground), at the next power on the device will be auto-configured in the default settings (refer to the User Guide of the device).

Connect power supply, serial bus and analogue outputs as shown in the "Wiring" section.

The "PWR" LED state depends on the working condition of the device: see the "Light Signalling" section to verify the device working state.

To perform configuration and calibration operations, read the instructions in the User Guide of the device.

To simplify handling or replacing of the device, it is possible to remove the wired terminals even with the device powered.

TECHNICAL SPECIFICATIONS (Typical @ 25 °C and in the nominal conditions)


OUTPUT (8 CHANNELS)			SERIAL OUTPUT		GENERAL SPECIFICATIONS		
Output Type	Min	Max	Data Transmission		Power supply voltage	18 .. 30 Vdc	
Voltage			RS-485 asynchronous serial Baud Rate 115.2 Kbps Max. distance 1.2 Km – 4000 ft		Reverse polarity protection	60 Vdc max	
Volt	0 V	+ 10 V			Max. Current consumption	30 mA	
Output Accuracy					ISOLATION		
Voltage	± 10 mV				Among all the ways	2000 Vac, 50 Hz, 1 min	
Thermal drift					ENVIRONMENTAL CONDITIONS		
Full scale	± 0.01 % / °C				Operative temperature	-10°C .. +60°C	
Load resistance					UL Operative Temperature	-10°C .. +40°C	
Voltage	≥ 5 KΩ				Storage temperature	-40°C .. +85°C	
Response time					Humidity (not condensing)	0 .. 90 %	
Slew-rate analogue output (with dedicated setting for each channel)					Maximum Altitude	2000 m slm	
			Installation	Indoor			
			Category of Installation	II			
			Pollution Degree	2			
			MECHANICAL SPECIFICATIONS				
			Material	Self-extinguish plastic			
			IP Code	IP20			
			Wiring	wires with diameter 0.8÷2.1 mm ² AWG 14-18			
			Tightening Torque	0.5 N m			
			Mounting	in compliance with DIN rail standard EN-50022			
			Weight	about 150 g.			
			CERTIFICATIONS				
			EMC (for the Industrial Environments)				
			Immunity	EN 61000-6-2			
			Emission	EN 61000-6-4			
			UKCA (ref S.I. 2016 N°1091)				
			Immunity	BS EN 61000-6-2			
			Emission	BS EN 61000-6-4			
			UL				
			US Standard	UL 61010-1			
			Canadian Standard	CSA C22.2 No 61010-1			
			CCN	NRAQ/NRAQ7			
			Typology	Open Type device			
			Classification	Industrial Control Equipment			
			File Number	E352854			

Value	V/s
00h	Disabled
01h	0.15
02h	0.30
03h	0.60
04h	1.20
05h	2.40
06h	4.80
07h	9.60
08h	19.2
09h	38.4
0Ah	76.8
0Bh	153
0Ch	Immediate

INSTALLATION INSTRUCTIONS

The device is suitable for fitting to DIN rails in the vertical position. For an optimum operation and long life follow these instructions: When the devices are installed side by side it may be necessary to separate them by at least 5 mm if panel temperature exceeds 45°C and at least one of the overload conditions exist or if panel temperature exceeds 35°C and at least two of the overload conditions exist. The overload conditions are the following:
 - High supply voltage: >27Vdc
 Make sure that sufficient air flow is provided for the device avoiding to place raceways or other objects which could obstruct the ventilation slits. Moreover it is suggested to avoid that devices are mounted above appliances generating heat; their ideal place should be in the lower part of the panel. Install the device in a place without vibrations. Moreover it is suggested to avoid routing conductors near power signal cables (motors, induction ovens, inverters etc...) and to use shielded cable for connecting signals.


CABLING

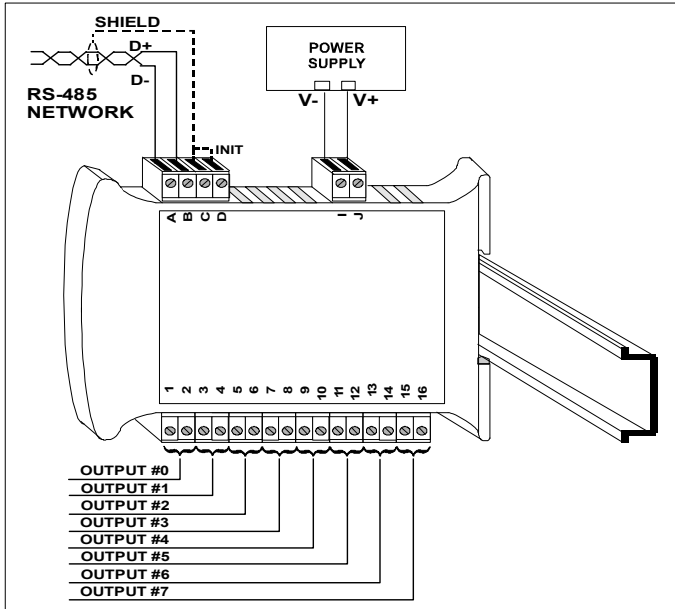


LIGHT SIGNALLING

LED	COLOR	STATE	DESCRIPTION
PWR	GREEN	ON	Device powered
		OFF	Device not powered / Wrong RS-485 cabling.
		FAST BLINKING	Communication in progress (the blinking frequency depends to baud-rate)
		1 second BLINKING	Watch-Dog Alarm condition

ISOLATION STRUCTURE

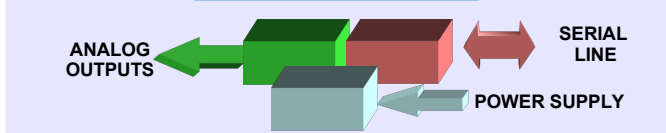


MECHANICAL DIMENSIONS (mm)

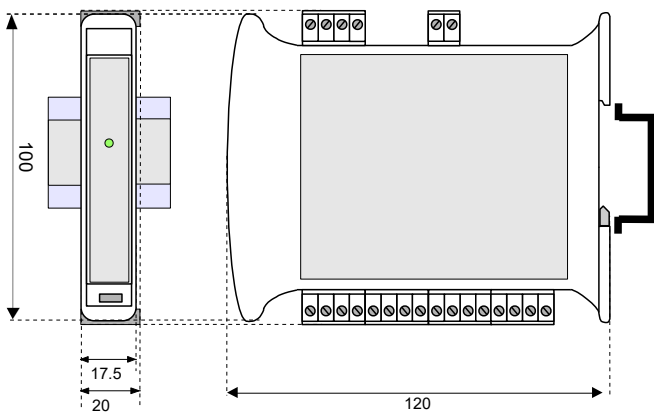


The symbol reported on the product indicates that the product itself must not be considered as a domestic waste. It must be brought to the authorized recycle plant for the recycling of electrical and electronic waste. For more information contact the proper office in the user's city, the service for the waste treatment or the supplier from which the product has been purchased.

WIRING

POWER SUPPLY (*)

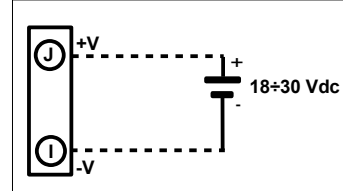


INIT

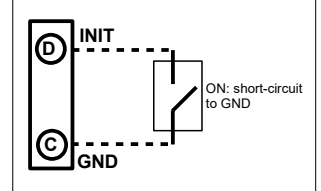

(*) Note: for UL installation the device must be powered using a power supply unit classified NEC class 2 or SELV with limited energy


ANALOG OUTPUTS

VOLTAGE

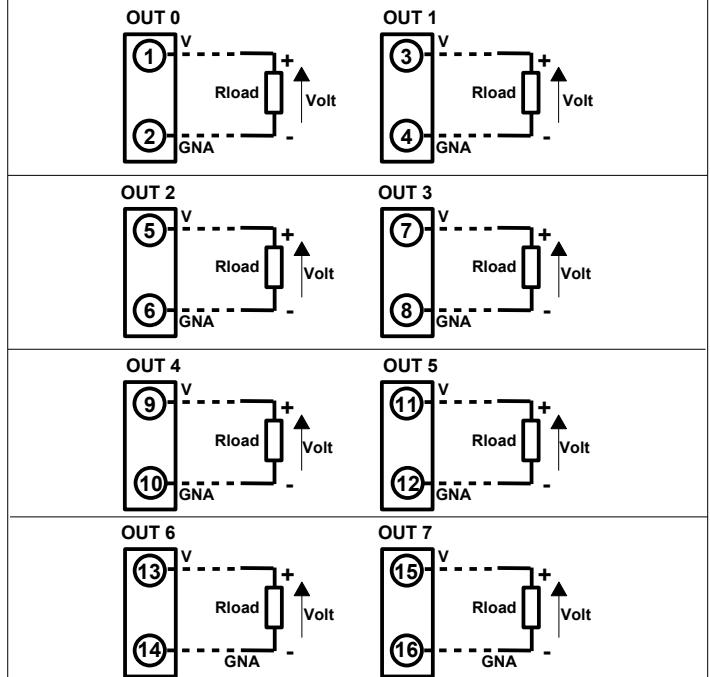


Note: the output channels are not isolated between them. Terminals GNA of channels connected between them.

RS-485

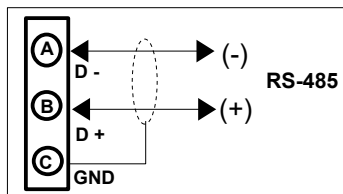

RS-232 (**)

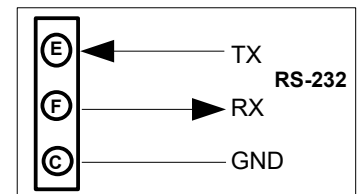

(**) for RS232 version INIT and GND are inverted between them

HOW TO ORDER

In the order, it is necessary to specify the interface type (RS485 or RS232). The device can be supplied with the configuration specified by the customer.

ORDER CODE:

DAT 3028 / 485

Interface type
 485 : RS-485
 232 : RS-232

■ = Requested
 □ = Optional