

Modbus TCP/IP server 4 isolated input channels for mA and Volt

DAT 8015

FEATURES

- Interface Ethernet 10/100 Base-T, Modbus TCP Server
- 4 isolated input channels
- Analogue inputs for mA and Volt
- Isolated power source for each channel to power passive sensors
- Integrated web server for acquiring the status of the analogue inputs via browser
- Remotely programmable
- Connection by removable screw-terminals
- LED signalling for Link/Act Ethernet, power supply
- Galvanic isolation on all the ways
- UL / CE / UKCA mark
- In compliance to EN-50022 DIN rail mounting



GENERAL DESCRIPTION

The device DAT8015 is a Modbus TCP server unit that can convert up to 8 analogue signals applied to the input in engineering units in digital format. The inputs can be connected to sensors with current or voltage output. The input channels are electrically isolated from each other.

For each input channel it is provided an isolated power source in order to power passive sensors. The device guarantees high accuracy and a stable measure versus time and temperature. In order to ensure the safety plant, the device is equipped with a Watch-Dog Timer system. The Ethernet interface allows reading and writing in real time the values of the internal registers of the device. The LEDs of signalling of Ethernet activity and power supply allow a direct monitoring of the system functionality. The built-in Web Server allows the remote visualization, acquisition of the analogue inputs and the access to the main Ethernet programming parameters. The device is also configurable by the software *Dev9K*, a free IDE developed by DATEXEL. The connection is made by removable screw-terminals (inputs and power supply) and RJ45 plug (Ethernet). The DAT8015 is in compliance with the Directive UL 61010-1 for US market and with the Directive CSA C22.2 No 61010-1 for the Canadian market. The device realizes a full electrical isolation between the lines, introducing a valid protection against the effects of all ground loops eventually existing in industrial applications. The device is housed in a rough self-extinguishing plastic enclosure which, thanks to its thin profile of 22.5 mm only, allows a high density mounting on EN-50022 standard DIN rail.

USER INSTRUCTIONS

Before to install the device, please read the "Installation Instruction" section. To configure the device use the INIT modality (refer to the User Guide of the device). Connect power supply, Ethernet and analogue inputs as shown in the "Wiring" section. The LEDs state depends on the working condition of the device: see the "Light Signalling" section to verify the device working state. To perform configuration and calibration operations, read the instructions in the User Guide of the device. To simplify handling or replacing of the device, it is possible to remove the wired terminals even with the device powered.

TECHNICAL SPECIFICATIONS (Typical @ 25 °C and in the nominal conditions)

INPUT			ETHERNET INTERFACE		GENERAL SPECIFICATIONS		
Input type	Min	Max	In compliance with Ethernet IEEE 802.3 Network interface Ethernet 10/100Base-T Protocol Modbus TCP Max. cable length 100 meters Number of socket 16		Power supply voltage	20 .. 30 Vdc	
Current mA	-20 mA	+20 mA			Reverse polarity protection	60 Vdc max	
					Current Consumption	220 mA max	
Input Accuracy (1) mA ±0.05 % f.s. Volt ±0.05 % f.s.					ISOLATION (test time : 1 minute)		
					Power Supply / Ethernet	1500 Vac, 50 Hz	
					Inputs / Power supply	1500 Vac, 50 Hz	
					Inputs / Ethernet	1500 Vac, 50 Hz	
Voltage Volt	-10 V	+10 V			Input / Input	1500 Vac, 50 Hz	
					ENVIRONMENTAL CONDITIONS		
Linearity (1) mA ±0.1 % f.s. Volt ±0.1 % f.s.					Operative Temperature	-10°C .. +60°C	
					UL Operative Temperature	-10°C .. +40°C	
					Storage Temperature	-40°C .. +85°C	
					Humidity (not condensed)	0 .. 90 %	
Input Impedance Volt ≥ 1 MΩ mA ~ 22 Ω					Maximum Altitude	2000 m	
					Installation	Indoor	
					Category of installation	II	
					Pollution Degree	2	
Thermal drift (1) Full Scale ± 0.01 %/°C					CONNECTIONS		
			Ethernet	RJ-45 (on side)			
Auxiliary Supply (for each channel) 12 Vdc min @ 20 mA			Inputs	Screw terminal block			
			Power Supply	Screw terminal block			
Short Circuit Current Auxiliary Supply 28 mA			MECHANICAL SPECIFICATIONS				
			Material	Self-extinguish plastic			
Sampling time (4 channels) 150 ms			IP Code	IP20			
			Wiring	wires with diameter 0.8+2.1 mm² / AWG 14-18			
(1) Referred to input Span (difference between max. and min. values)			Tightening Torque	0.5 N m			
			Mounting	in compliance with DIN rail standard EN-50022			
(**) 4 Operative Auxiliary Supply @20mA			Weight	about 160g			
			EMC (for industrial environments)				
			Immunity	EN 61000-6-2			
			Emission	EN 61000-6-4			
			UKCA (ref S.I. 2016 N°1091)				
			Immunity	BS EN 61000-6-2			
			Emission	BS EN 61000-6-4			
			UL				
			US Standard	UL 61010-1			
			Canadian Standard	CSA C22.2 No 61010-1			
			CCN	NRAQ/NRAQ7			
			Typology	Open Type device			
			Classification	Industrial Control Equipment			
			File Number	E352854			

INSTALLATION INSTRUCTIONS

The device is suitable for fitting to DIN rails in vertical position.
For optimum operation and long life follow these instructions:

When the devices are installed side by side it is necessary to separate them by at least:

- 10 mm if the UL certification is required.

- 5 mm if the UL certification is not required.

Make sure that sufficient air flow is provided for the device avoiding to place raceways or other objects which could obstruct the ventilation slits. Moreover it is suggested to avoid that devices are mounted above appliances generating heat; their ideal place should be in the lower part of the panel.


Install the device in a place without vibrations.

Moreover it is suggested to avoid routing conductors near power signal cables (motors, induction ovens, inverters, etc...) and to use shielded cable for connecting signals.


LIGHT SIGNALLING

LED	COLOUR	STATE	DESCRIPTION
PWR	GREEN	ON	Device powered
		OFF	Device not powered
		BLINK	Watchdog alarm
STS	YELLOW	OFF	Device in RUN modality
		BLINK	Device in INIT modality

ISOLATIONS STRUCTURE

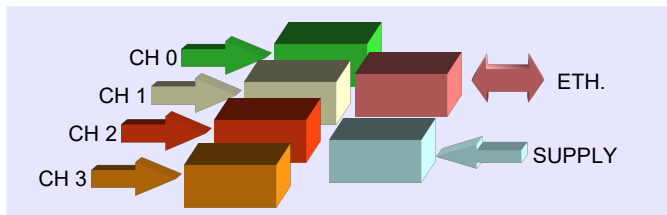


MECHANICAL DIMENSIONS (mm)

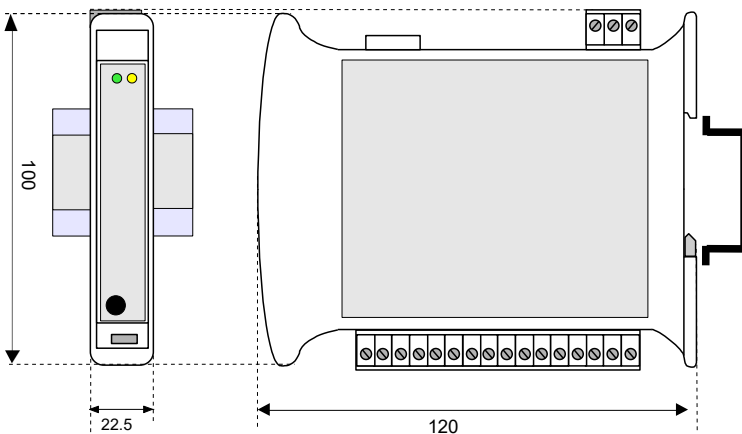


WIRING

POWER SUPPLY(*)



INIT




(*) Note: for UL installation the device must be powered using a power supply unit classified NEC class 2 or SELV and Limited Energy


ANALOGUE INPUTS

VOLTAGE


INPUT 1




INPUT 3



INPUT 5




INPUT 7




PASSIVE mA INPUT


INPUT 0




INPUT 2



INPUT 4




INPUT 6




ACTIVE mA INPUT


INPUT 0




INPUT 2



INPUT 4



INPUT 6



NOTES:

"GNA0", "GNA1", "GNA2" and "GNA3" are isolated between them.

Input Voltage 1 and Input current 0 belong to channel 0 (CH0)
Input Voltage 3 and Input current 2 belong to channel 1 (CH1)
Input Voltage 5 and Input current 4 belong to channel 2 (CH2)
Input Voltage 7 and Input current 6 belong to channel 3 (CH3)

MAPPING MODBUS REGISTERS

Register Position	Description	Access
40002	Firmware [0]	RO
40003	Firmware [1]	RO
40004	Name [0]	R/W
40005	Name [1]	R/W
40007	Node ID	R/W
40011	System Flags	R/W
40013	Watchdog timer	R/W
40031	Input type Channels 0 (1-0)	R/W
40032	Input type Channels 1 (3-2)	R/W
40033	Input type Channels 2 (5-4)	R/W
40034	Input type Channels 3 (7-6)	R/W
40041	Analogue Input (0) - mA	RO
40042	Analogue Input (1) - V	RO
40043	Analogue Input (2) - mA	RO
40044	Analogue Input (3) - V	RO
40045	Analogue Input (4) - mA	RO
40046	Analogue Input (5) - V	RO
40047	Analogue Input (6) - mA	RO
40048	Analogue Input (7) - V	RO

CH0
CH1
CH2
CH3



The symbol reported on the product indicates that the product itself must not be considered as a domestic waste.
It must be brought to the authorized recycle plant for the recycling of electrical and electronic waste.
For more information contact the proper office in the user's city, the service for the waste treatment or the supplier from which the product has been purchased.

HOW TO ORDER

" DAT 8015 "

Note: the device is provided with default configuration as:

IP address : 192.168.1.100

Modbus address: 1